

Specifications

Head: Type 9251

Rating: 90-250 VOLTS A.C. 50-60 Hz. 400 Watts, 4 Amps Max.

DMX Standby draw <0.1 AMPS

Light Source: (6) 75 Watt Mole-Richardson Proprietary Color Mixing LEDs.
97CRI 2700° K - 95CRI 5600°K

Fuse: 5 Amp, Slow-Blow, Fuseholder in top cover.

Dimming: Flicker-Free, Direct DC Dimming 100% - 0%

Reflector: Polished Aluminum, 60 Degree.

Cooling: Passive-Forced Air.

Construction: Rugged, Sheet Aluminum.

Compliance: RoHS, CE, UL, CSA Pending.

IP Rating: 30.

Finish: Textured Epoxy Powder Coat.

Weight: 18lbs/8.2kg

Cable: Detachable 20 ft. (6m) cable, powerCON to Edison with inline toggle switch (included in price of fixture)

Local Control: Two on-board potentiometers
Dimming (100% - 0)

Color Temperature (2700°K to 5600°K)

DMX Control: Ch. 1 - Color Temp: 0 = 2700°K - 5600°K

Ch. 2 - Intensity: 0 - 100 %

Accessories

Black Solid Skirt

Silk Skirt

Silk Target

Half Black Solid Skirt

Yoke Assembly

Diffuser Frame (22 1/2" dia.)

Accessory Bag

Pass-thru Cable powerCON to powerCON - 25ft

* Skypan Accessories

Yoke Assembly

Diffuser Holder

Diffuser Frame (18 1/2" dia.)

Full Single Scrim—Stainless Steel (18 1/2" dia.)

Full Double Scrim—Stainless Steel (18 1/2" dia.)

Accessory Bag

Item Number

727-10

727-11

727-12

727-31

927-14

72729

G140

927352

Item Number

927-14

927-70


418103

418109S

418109D

G139

400W LED Vari-Space Performance Data

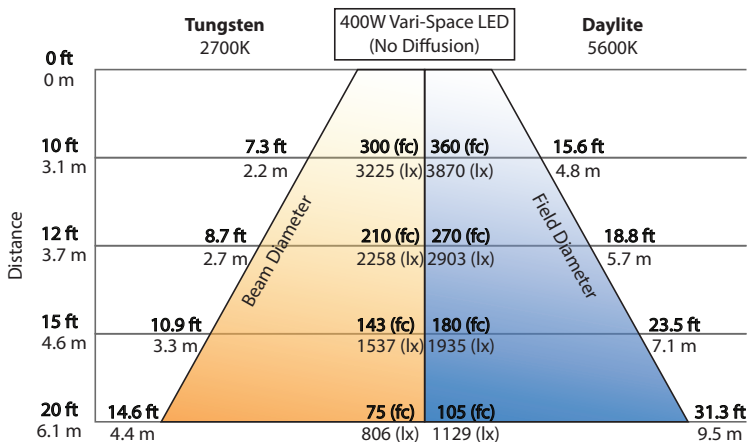

* Light tapers smoothly at edge of field. Dimensions listed define flat area boundaries at which the intensities are approximately 50% of tabulated intensities at beam center.



* Skypan